

# Specification Sheet

## ETO/C-100

Ethylene Oxide Gas Sensor in Compact Housing



### MEASUREMENT

Operation Principle	3-Electrode Electrochemical
Nominal Range	0 - 100 ppm
Maximum Overload	200 ppm
Inboard Filter	-
Output Signal	200 ± 40 nA/ppm
Resolution (Electronics dependent)	< 1 ppm
T90 Response Time	< 140 sec
Typical Baseline Range (pure air, 20°C)	1 ppm to 10 ppm
Maximum Zero Shift (+20°C to +40°C)	N.D.
Repeatability	< 2 % of signal
Output Linearity	Linear
Gain	-

### ELECTRICAL

Rec. Load Resistor	10 Ohm
Bias (V_Sens-V_Ref)	+300 mV
Conformity to RoHS directive	RoHS Compliance

### ENVIRONMENTAL

Relative Humidity Range	15 % to 90 % R.H. non-condensing
Temperature Range	-40 °C to 50 °C
Pressure Range	Atmospheric ± 10%
Pressure Coefficient	N.D.
Humidity Effect	none

### LIFETIME

Expected Operation Life	2 years in air
Expected Long Term Output Drift in air	< 2 % per month
Filter Life	-
Storage Life	6 months in container
Rec. Storage Temperature	5 °C – 20 °C
Warranty Period	12 months from date of dispatch


Performance data conditions: 20 °C, 50% RH, 1013 mbar

### IMPORTANT NOTE


1) Fresh sensors with bias need 24-72 h for stabilization of the baseline

### Compact-Size Outline Dimensions

BOTTOM VIEW



SIDE VIEW

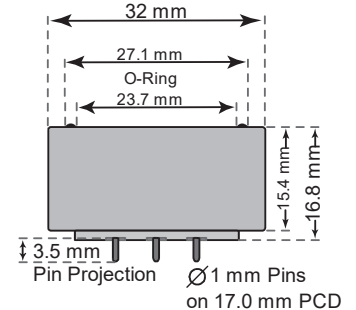

± 0.10 mm

### MECHANICAL

Weight	13 g
Position Sensitivity	None

### APPLICATIONS

Sterilization Processes  
Safety and Environmental Control

### CROSS-SENSITIVITY DATA

The table below does not claim to be complete. Interfering gases should not be used for calibration.

Interfering Gas	Conc. ppm	Reading ppm
CO	100	45
Ethanol	30	21
Formic Acid	42	42 ± 3
Aromatic Hydrocarbons	30	< 15